


SP CUSTOM HANDWOUND PICKUPS WIRING INFORMATIONS

braided shield to ground ______ + hot to controls


(For vintage braided wire with the optional split/tap wire, connect the split/tap wire to ground with an on/off toggle or push/pull switch for the coil tap option)

4 conductor full humbucker operation (series)




4 conductor full humbucker operation (series) w/coil tap switch

use spdt mini toggle switch on/on

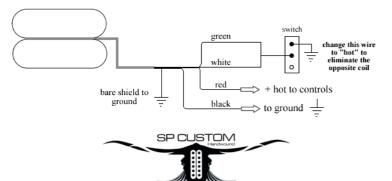


SP CUSTOM HANDWOUND PICKUPS WIRING INFORMATIONS




(For vintage braided wire with the optional split/tap wire, connect the split/tap wire to ground with an on/off toggle or push/pull switch for the coil tap option)

4 conductor full humbucker operation (series)

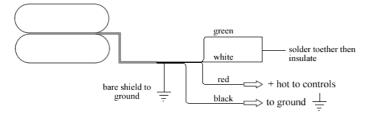


4 conductor full humbucker operation (series) w/coil tap switch use spdt mini toggle switch on/on




SP CUSTOM HANDWOUND PICKUPS WIRING INFORMATIONS

4 conductor full humbucker operation (series) w/variable coil tap

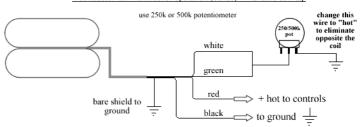

4 conductor humbucker series/split/parallel operation (switchable)

use dpdt mini toggle switch on/on/on



NOTES

Coil tapping eliminates one coil by grounding it out, giving the pickup a single coil tone. This also disables the hum-cancelling capabilities of the pickup.


Connections to ground are soldered to any pot casing which in turn should be part of the main ground.

When wiring 2 pickups follow directions as stated previously for proper operation of any pair

Series operation is standard full humbucker, tapped/split operation is 1 coil by itself, and parallel operation is both coils with more of an open "Strat" tone


SP CUSTOM HANDWOUND PICKUPS WIRING INFORMATIONS

4 conductor full humbucker operation (series) w/variable coil tap

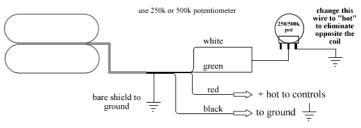

4 conductor humbucker series/split/parallel operation (switchable)

use dpdt mini toggle switch on/on/on

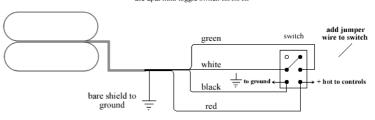

NOTES

Coil tapping eliminates one coil by grounding it out, giving the pickup a single coil tone. This also disables the hum-cancelling capabilities of the pickup.

Connections to ground are soldered to any pot casing which in turn should be part of the main ground.

When wiring 2 pickups follow directions as stated previously for proper operation of any pair

Series operation is standard full humbucker, tapped/split operation is 1 coil by itself, and parallel operation is both coils with more of an open "Strat" tone